



Aplicación y propiedades

Tubo fabricado en continuo y diseñado para operaciones de limpieza con agua caliente, especialmente indicado para la industria alimentaria. Atóxico. Cumple con la norma FDA.

Composición

Tubo interior

Caucho sintético de color blanco.

Refuerzo

Sintético textil de alta tenacidad.

Tubo exterior

Caucho sintético de color azul o blanco.

Longitud de fabricación

50 y/o 100 mts., dependiendo del diámetro.

Gama de temperatura

De -30° a 110° C

Application and properties

Long length hose moulded designed for hot water cleaning operations, mainly in the food industry. Atoxic. According to FDA.

Construction

Tube

White synthetic rubber.

Reinforcement


High tensile strength synthetic yarn.

Cover

Blue or white synthetic rubber.

Temperature range

From -30° to 110° C

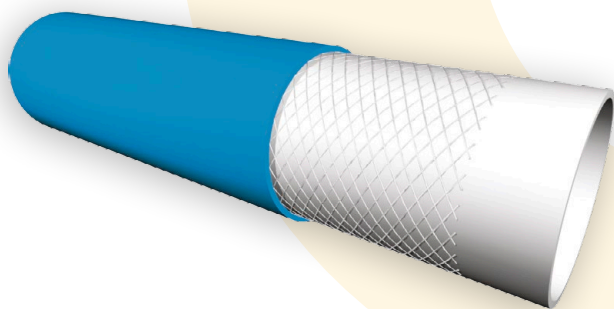

Características técnicas / Technical features

	Diámetro interior Internal diameter		Diámetro exterior External diameter		Presión de trabajo Working pressure		Presión de rotura Bursting pressure		Peso Weight	R. curv. Bending R.
	mm	"	mm	"	bar	psi	bar	psi	kg/m	mm
KLELIMP10010	10	3/8	17	11/16	10	150	30	450	0,24	50
KLELIMP10013	13	1/2	21	13/16	10	150	30	450	0,33	65
KLELIMP10016	16	5/8	25	1	10	150	30	450	0,42	75
KLELIMP10019	19	3/4	29	1 1/8	10	150	30	450	0,58	80
KLELIMP10025	25	1	35	1 3/8	10	150	30	450	0,72	110

Otros diámetros, longitudes y características, a consultar. Fabricamos todo tipo de mangueras especiales.
Other dimensions, lengths or features available upon request. We manufacture any type of special hoses.